

brera

Dairy and cold cuts display



The new line of BRERA displays was created to preserve dairy and cold cuts at the ideal temperature and to expose them directly into the dining area.

Due to their elegant design and compact size, the displays are perfect for storage in any type of location. The controlled ventilation guarantees the preservation of taste and aroma.

The all-glass door with UV treatment and shiny black perimeter gives to BRERA displays a sophisticated look and ensures maximum visibility of the stored products.

The led-lights have been especially designed to enhance the product appearance and to reflect in the internal cover made of AISI 304 stainless steel.

The displays are equipped with high-performance refrigeration systems and with low noise compressors. The "touch" digital thermostat gives a constant view of temperature and ventilation.

It is possible to choose the internal fitting between stainless steel tubes, hanging rods and stainless steel perforated shelves.

INTERNAL EQUIPMENT EXCLUDED.

TECHNICAL DATA:

Climatic class




External dimensions (WxDxH)	cm
Doors	nr
Refrigeration type	
Max absorbed power **	W
Refrigeration power ***	W
Temperature*	°C
Gas	
Defrosting system	
Noise level of condensing unit	
Input voltage	

S	SF5/121	
8	81x50x210	
	1	
\	entilated/	
	515	
	305	
	+2/+10	
	R290	
Automatic with paus		
<43dba		
1x2	230V/50Hz	
	4	

^{*}Ambient temperature +26°C / Evap. -10°C cond. +45°C / **ASHRAE (Evap. -23,3°C cond. +54,4°C)




INSTALLATION DIAGRAM:

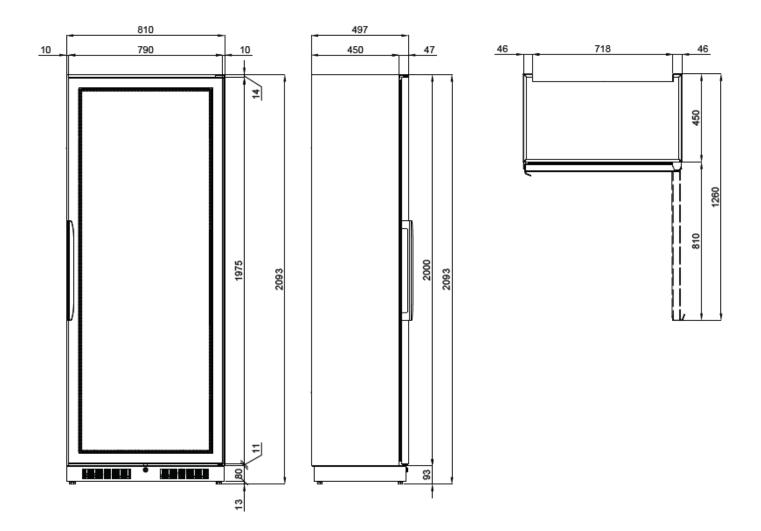

ELECTRICITY SUPPLY: 230V ~ 1 – 50Hz Wire lenght 1,5mt (*SCHUKO plug)



ACCESSORIES AND SURCHARGES ON REQUEST:



DR5/01

S/s shelf



DT5/02

S/s hanging rods for meat with

no. 2 S/s tubes and no. 3 s/s hooks included



WPS/5

S/s closing cover cm 81X50X2H



60002120

S/s hook



60002150


Wi-Fi supervising system for BRERA



40200560

60002200

Painted color finishing WD DA SF (overprice)



60Hz frequency

Prearranged version with valve system